


This document only contains the description of the project and the project problems. For the programming exercises on concepts related to the project, please refer to the project checklist available on the course website.


Goal Write a program to estimate the percolation threshold of a system.

Percolation Given a composite system comprising of randomly distributed insulating and metallic materials: what fraction of the system needs to be metallic so that the composite system is an electrical conductor? Given a porous landscape with water on the surface (or oil below), under what conditions will the water be able to drain through to the bottom (or the oil to gush through to the surface)? Scientists have defined an abstract process known as *percolation* to model such situations.

The Model We model a percolation system using an $n \times n$ grid of sites. Each site is either open or blocked. A full site is an open site that can be connected to an open site in the top row via a chain of neighboring (left, right, up, down) open sites. We say the system percolates if there is a full site in the bottom row. In other words, a system percolates if we fill all open sites connected to the top row and that process fills some open site on the bottom row. For the insulating/metallic materials example, the open sites correspond to metallic materials, so that a system that percolates has a metallic path from top to bottom, with full sites conducting. For the porous substance example, the open sites correspond to empty space through which water might flow, so that a system that percolates lets water fill open sites, flowing from top to bottom.

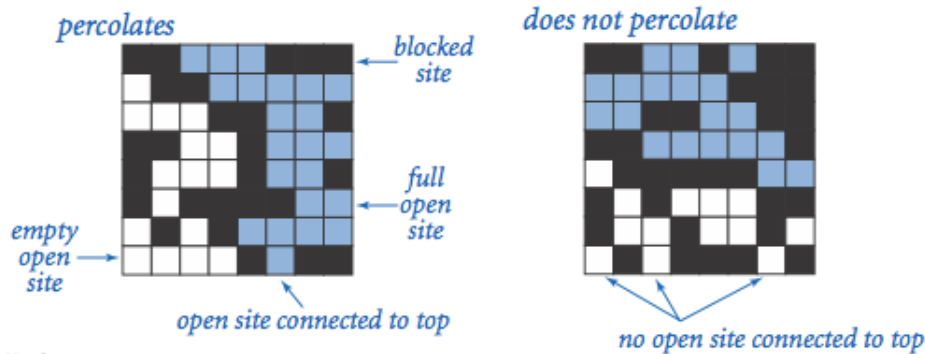

The Problem If sites are independently set to be open with probability p (and therefore blocked with probability $1 - p$), what is the probability that the system percolates? When p equals 0, the system does not percolate; when p equals 1, the system percolates. The plots below show the site vacancy probability p versus the percolation probability for 20×20 random grid (left) and 100×100 random grid (right).

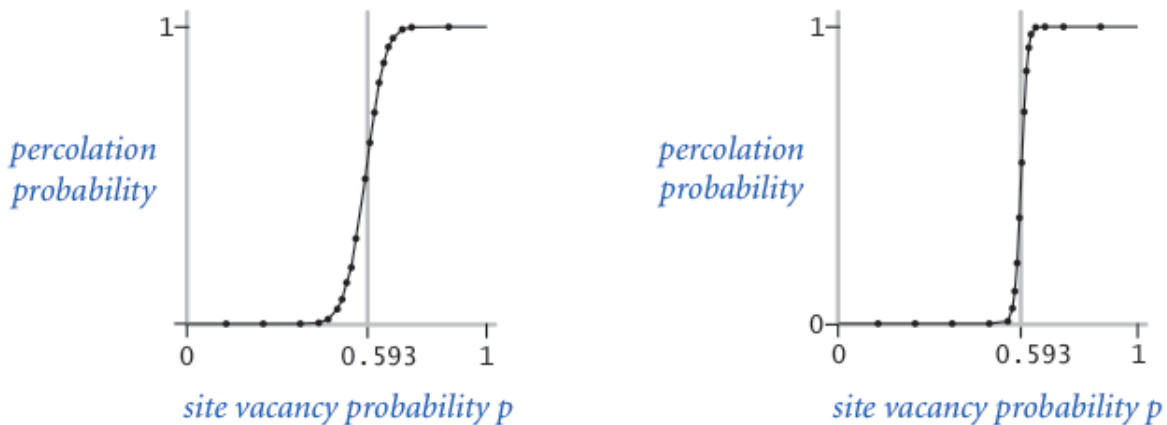

Project 1 (Percolation)

When n is sufficiently large, there is a threshold value p^* such that when $p < p^*$ a random $n \times n$ grid almost never percolates, and when $p > p^*$, a random $n \times n$ grid almost always percolates. No mathematical solution for determining the percolation threshold p^* has yet been derived. Your task is to write a computer program to estimate p^* .

Problem 1. (*Model a Percolation System*) To model a percolation system, define a data type called `Percolation` that supports the following API:

Percolation	
<code>Percolation(int n)</code>	constructs an $n \times n$ percolation system, with all sites blocked
<code>void open(int i, int j)</code>	opens site (i, j) if it is not already open
<code>boolean isOpen(int i, int j)</code>	returns <code>true</code> if site (i, j) is open, and <code>false</code> otherwise
<code>boolean isFull(int i, int j)</code>	returns <code>true</code> if site (i, j) is full, and <code>false</code> otherwise
<code>int numberOfOpenSites()</code>	returns the number of open sites
<code>boolean percolates()</code>	returns <code>true</code> if this system percolates, and <code>false</code> otherwise

Corner Cases

- The constructor should throw an `IllegalArgumentException("Illegal n")` if $n \leq 0$.
- The methods `open()`, `isOpen()`, and `isFull()` should throw an `IndexOutOfBoundsException("Illegal i or j")` if i or j is outside the interval $[0, n - 1]$.

Performance Requirements


- The constructor should run in time $T(n) \sim n^2$.
- All methods should run in time $T(n) \sim 1$.
- The data type should consume space $S(n) \sim n^2$.

```
>_ ~/workspace/project1
$ java Percolation data/input10.txt
10 x 10 system:
  Open sites = 56
  Percolates = true
$ java Percolation data/input10-no.txt
10 x 10 system:
  Open sites = 55
  Percolates = false
```

Problem 2. (*Estimate Percolation Threshold*) To estimate the percolation threshold, consider the following computational (Monte Carlo simulation) experiment:

- Create an $n \times n$ percolation system with all sites blocked.
- Repeat the following until the system percolates:
 - Choose a site (row i , column j) uniformly at random among all blocked sites.
 - Open the site (row i , column j).
- The fraction of sites that are open when the system percolates provides an estimate of the percolation threshold.

For example, if sites are opened in a 20×20 grid according to the snapshots below, then our estimate of the percolation threshold is $204/400 = 0.51$ because the system percolates when the 204th site is opened.

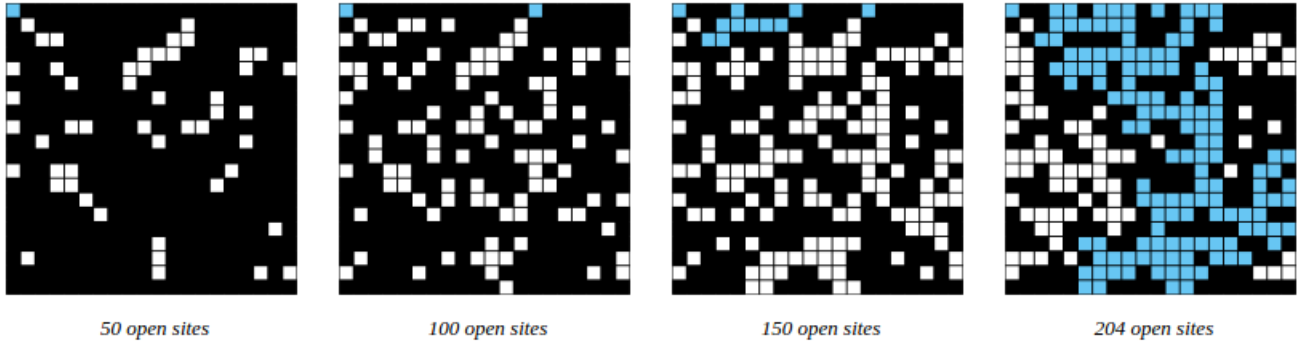

By repeating this computational experiment m times and averaging the results, we obtain a more accurate estimate of the percolation threshold. Let x_1, x_2, \dots, x_m be the fractions of open sites in computational experiments $1, 2, \dots, m$. The sample mean μ provides an estimate of the percolation threshold, and the sample standard deviation σ measures the sharpness of the threshold:

$$\mu = \frac{x_1 + x_2 + \dots + x_m}{m}, \quad \sigma^2 = \frac{(x_1 - \mu)^2 + (x_2 - \mu)^2 + \dots + (x_m - \mu)^2}{m - 1}.$$

Assuming m is sufficiently large (say, at least 30), the following interval provides a 95% confidence interval for the percolation threshold:

$$\left[\mu - \frac{1.96\sigma}{\sqrt{m}}, \mu + \frac{1.96\sigma}{\sqrt{m}} \right].$$

To perform a series of computational experiments, create an immutable data type called `PercolationStats` that supports the following API:

PercolationStats	
<code>PercolationStats(int n, int m)</code>	performs m independent experiments on an $n \times n$ percolation system
<code>double mean()</code>	returns sample mean of percolation threshold
<code>double stddev()</code>	returns sample standard deviation of percolation threshold
<code>double confidenceLow()</code>	returns low endpoint of 95% confidence interval
<code>double confidenceHigh()</code>	returns high endpoint of 95% confidence interval

The constructor perform m independent computational experiments (discussed above) on an $n \times n$ grid. Using this experimental data, it should calculate the mean, standard deviation, and the 95% confidence interval for the percolation threshold.

Corner Cases

- The constructor should throw an `IllegalArgumentException("Illegal n or m")` if either $n \leq 0$ or $m \leq 0$.

Performance Requirements

- The constructor should run in time $T(n, m) \sim mn^2$.
- All methods should run in time $T(m) \sim m$.

```
>_ ~/workspace/project1
$ java PercolationStats 100 1000
Percolation threshold for a 100 x 100 system:
Mean = 0.592
Standard deviation = 0.016
Confidence interval = [0.591, 0.594]
```

Acknowledgements This project is an adaptation of the Percolation assignment developed at Princeton University by Robert Sedgewick and Kevin Wayne.